

THR type high pressure reactor with magnetic stirrer


1.Application: Chemistry, Pharmaceutical, Macromolecule, Metallurgy, Environmental Protection, etc, chemical process areas. For instance: high pressure reaction, hydrogenation reaction, catalytic reaction, synthetic process, pharmaceutical synthesis, high pressure polymerization, nano synthesis, conditions screening, crystallization screening, combinatorial chemistry, biomass conversion, supercritical reaction, hydrothermal reaction, polymer synthesis, electrochemical corrosion testing, infrared detection, etc.

2.The maximum operating temperature of THR High Pressure Reactor is 250°C, use corrosive medium to do reaction, PTFE inner is optional, but its high temperature resistance is 180°C, so if the corrosive medium temperature is over 180°C, please choose other material reactors.

3.THR Series High Pressure Reactor adopt module heating method, which is quick heating and precise temperature control. THR series all are internal magnetic stirring, when magnetism arrive 300°, degaussing phenomenon will happen, so if operating in over 300° condition, please choose TOPTION MHR Series High Pressure Reactor.



Detail description

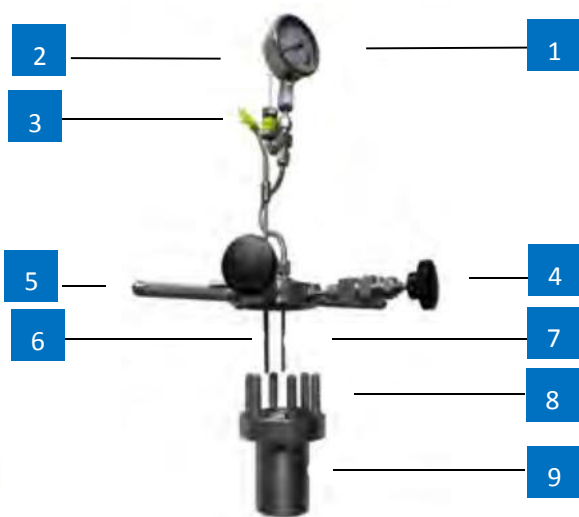

1. Pressure Gage - monitor working pressure in reactor.
2. Explosion Valve - Protect reactor overpressure working.
3. Temperature Sensor Plug - monitor the temperature in reactor, connect with thermocouple.
4. Needle valve - air inflow, exhaust or sampling.
5. Handlebar - to tear down reactor lid.
6. Temperature measure jacket tube - used to insert temperature sensor.
7. Accused of bottom tube - used to sample during reaction.
8. Reactor lid lock screw - uniform distribution 6pcs in total, clockwise is tight, anticlockwise is loose.
9. Reactor body - coefficient of material charging is 80% of reactor whole volume, not suitable for all kinds of medium.



THR type high pressure reactor with magnetic stirrer

1. Temperature display - display real time temp. when working.
2. Rotating speed display - display real time rotating speed during working.
3. Indicator lamp display - function indicator when working.
4. Temp & time set key [T-Set] - used to set temperature, timing, and parameters which is related with temperature & time.
5. UpKey - add key.
6. Down key and self set key - reduce key and self set key.
7. Lift key and check key - shift key and check working time & timing.
8. Speed set key - used to set speed and related parameters.
9. Working and stop key - start or stop working.



Technical specification

The stirring reactor laboratory miniature high-pressure reaction kettle

Model	THR50	THR100	THR250	THR500
Material capacity(L)	50ml	100ml	250ml	500ml
The working interface	Touch control liquid crystal display	Touch control liquid crystal display	Touch control liquid crystal display	Touch control liquid crystal display
The maximum operating temperature	250℃	250℃	250℃	250℃
The maximum operating temperature with PTFE Liner	180℃	180℃	180℃	180℃
Heating mode	Module heating	Module heating	Module heating	Module heating
The heating power	1.2KW	1.2KW	1.5KW	2.0KW
Stirring speed	0-1200rpm	0-1200rpm	0-1300rpm	0-1300rpm
Stirring method	The internal magnetic stirring	The internal magnetic stirring	The internal magnetic stirring	The internal magnetic stirring
The stirring power	40W	40W	40W	80W
The maximum working pressure	10Mpa	10Mpa	10Mpa	10Mpa
Materials of construction	SS316L (standard); (Alloy TA2, ALLOY C-276, Nickel ALloy, Zirconium materials are optional)			
PTFE liner	Optional			

Note:


1. Max volume 2000ml could be customized.
2. Suitable for the material which temp <250℃ and is nonmagnetic.
3. Temperature timing set, temp. set when working, this function is optional.



MHR type high pressure reactor with magnetic coupling mechanical agitation

Configuration and description

1. Rotating speed and temperature control panel (LCD display and Nixie tube display are optional).
2. Internal heat collection heater.
- 3.4. Stainless steel reactor.
5. Air inlet valve (sampling valve).
6. Air exhaust valve.
7. Principal axis cooling jacket.
8. The coupling magnetic steel.
9. Sensor insert mouth.
10. Pressure meter.
11. Transmission flexible shaft.
12. Flexible shaft support frame.
13. Dynamical system.
14. MHR high pressure reactor is suitable for small capacity sample reaction, high temp, big viscosity or magnetism medium.
15. Safety explosion protection valve is 12.5MPa, digital display pressure meter is optional.
16. Max working temp:350℃, module electric heating, heating quickly and control temp precise.

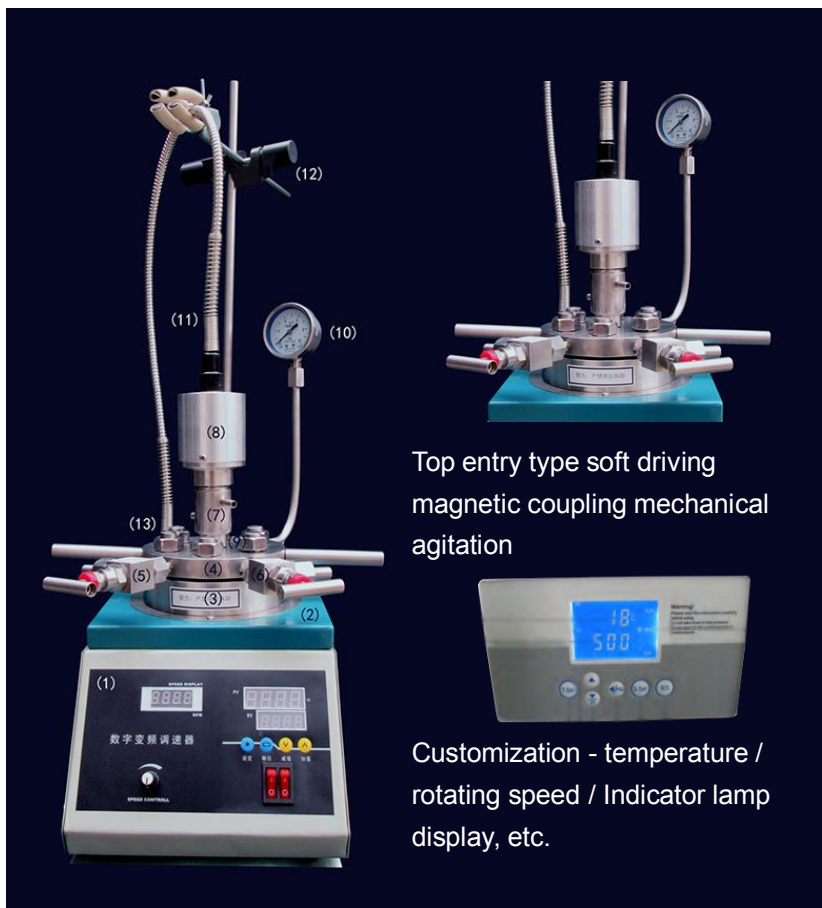

Top entry type soft driving magnetic coupling mechanical agitation

Customization - temperature / rotating speed / Indicator lamp display, etc.

Model	MHR50	MHR100	MHR250	MHR500
Material capacity(L)	50ml	100ml	250ml	500ml
The working interface	Touch control liquid crystal display			
The maximum operating temperature	250℃	250℃	250℃	250℃
The maximum operating temperature with PTFE Liner	180℃	180℃	180℃	180℃
Heating mode	Module heating	Module heating	Module heating	Module heating
The heating power	1.2KW	1.2KW	1.5KW	2.0KW
Stirring speed	0-1200rpm	0-1200rpm	0-1300rpm	0-1300rpm
Stirring method	Rare earth permanent magnetic coupling drive			
The stirring power	40W	40W	40W	80W
The maximum working pressure	10Mpa	10Mpa	10Mpa	10Mpa
Materials of construction	SS316L (standard); (Alloy TA2, ALLOY C-276, are optional)			
PTFE liner	Optional			

Note: 1. Max volume 2000ml could be customized.

2.Suitable for the material which temp >250℃ and has magnetism, viscosity is a little big.

3.Temperature timing set, temp. set when working, this function is optional.

THR (N) series high pressure reactor with magnetic stirrer

Parallel micro high pressure reactor do research with more than one THR series high pressure reactor at the same time, each THR high pressure reactor is equipped with independent heating, stirring and pressure component, to ensure every high pressure reactor could do research independent under different temperature, pressure and stirring speed conditions, so as to screen experimental conditions more quickly and optimize it.



The reaction kettle bit and volume could be flexible combination, for ordinary, has 2, 4, 6, 8 parallel high pressure reactor, you could customize based on your actual experimental requirements.



Standard configuration of Parallel micro high pressure reactor

- | | | |
|--------------------------------|------------------------------------|----------------------------------|
| 1. Pressure meter. | 2. Safety valve. | 3. Temperature sensor. |
| 4. Inlet valve. | 5. Sampling valve. | 6. Vent valve. |
| 7. Heating switch. | 8. Stirring switch. | 9. Rotating speed display meter. |
| 10. Temperature display meter. | 11. Rotating speed control button. | 12. Temperature control button. |
| 13. The first via inlet valve. | 14. The second via inlet valve. | |



THR (N) series high pressure reactor with magnetic stirrer



Technical specification

Model	THR50 (N)	THR100 (N)	THR250 (N)	THR500 (N)
The reaction kettle bit	N=2, 4, 6, 8			
Material capacity(L)	50ml	100ml	250ml	500ml
The working interface	Touch control liquid crystal display			
The maximum operating temperature	250℃	250℃	250℃	250℃
The maximum operating temperature with PTFE Liner	180℃	180℃	180℃	180℃
Heating mode	Module heating			
The heating power	1.2KW	1.2KW	1.5KW	2.0KW
Stirring speed	0-1200rpm	0-1200rpm	0-1300rpm	0-1300rpm
Stirring method	The internal magnetic stirring			
The stirring power	40W	40W	40W	80W
The maximum working pressure	10Mpa	10Mpa	10Mpa	10Mpa
Materials of construction	SS316L (standard); (Alloy TA2, ALLOY C-276, are optional)			
PTFE liner	Optional			



KCFD type mini high pressure reactor

Description

1. Make cumbersome experimental simple, it can be realized in one operation with different environments or with different environment temperature/ pressure diversified series of different experiments.
2. Through the RS232 communication interface a computer connected to print and show the historical value and the actual curve according to user's needs, the whole system can be monitored real time by software.
3. Catalysis, high temperature and pressure synthesis, dynamics testing, Fischer- tropsch, and hydrogenation reaction. Mainly used in the fields of biochemical, chemical material, environmental protection new material reaction, etc.



Small- high-pressure reactor (the Lid can rise ,the reactor can turn,without bottom discharge)	TOPT-KCFD025-10	1. Volume:0.25L 3. Temp:RT--300°C 5. Agitation type:with Mechanical agitation	2. Design pressure: <10MPa 4. Materials:SS304
	TOPT-KCFD03-10	1. Volume:0.3L 3.Temp: RT--300°C 5.Agitation type:with Mechanical agitation	2. Design pressure: <10MPa 4.Materials:SS304
	TOPT-KCFD05-10	1. Volume:0.5L 3. Temp:RT--300°C 5. Agitation type:with Mechanical agitation	2. Design pressure: <10MPa 4. Materials:SS304
	TOPT-KCFD1-10	1. Volume: 1L 3. Temp:RT--300°C 5. Agitation type:with Mechanical agitation	2. Design pressure: <10MPa 4. Materials:SS304
	TOPT-KCFD2-10	1. Volume: 2L 3. Temp:RT--300°C 5. Agitation type:with Mechanical agitation	2. Design pressure: <10MPa 4. Materials:SS304;
	TOPT-KCFD5-10	1. Volume: 5L 3. Temp:RT--300°C 5. Agitation type:with Mechanical agitation	2. Design pressure: <10MPa 4. Materials:SS304;

Rotary Evaporator

Scraped Film Evaporator /
Short Path (Molecular)
Distillation SystemChemical Glass
ReactorHigh Shear Homogen-
eous Emulsification
ReactorPilot Ultrasonic
Emulsification ReactorVacuum Filter / Glass
Liquid SeparatorPhotochemical
Glass ReactorHydrothermal
Synthesis ReactorHigh Pressure
Reactor



TFCF type hand-lifted high pressure reactor

Customization support



Technical specification

<p>High-pressure reactor</p> <p>(the Lid can rise ,the reactor can not turn,with bottom discharge)</p>	TOPT-TFCF1-10	<ol style="list-style-type: none"> 1. Volume: 1L 2. Design pressure: <10MPa 3. RT--300°C; 4. Material: SS304; 5. Type agitation:with Mechanical agitation
	TOPT-TFCF2-10	<ol style="list-style-type: none"> 1.Volume: 2L 2.Design pressure: <10MPa 3.RT--300°C; 4.Material: SS304; 5.Type agitation:with Mechanical agitation
	TOPT-TFCF5-10	<ol style="list-style-type: none"> 1.Volume: 5L 2.Design pressure: <10MPa 3.RT--300°C; 4.Material: SS304; 5.Type agitation:with Mechanical agitation
	TOPT-TFCF10-10	<ol style="list-style-type: none"> 1.Volume: 10L 2.Design pressure: <10MPa 3.RT--300°C; 4.Material: SS304; 5.Type agitation:with Mechanical agitation
	TOPT-TFCF20-10	<ol style="list-style-type: none"> 1.Volume: 20L 2.Design pressure: <10MPa 3.RT--300°C; 4.Material: SS304; 5.Type agitation:with Mechanical agitation



High pressure reactor customization



2L type



2L-4 parallel type



3L type



5L type



5L hand-lifting type



Reactor stirring part



10L type



50L type

More high pressure reactor, welcome contact with our specialist:
0086-29-88763980
info@toptionlab.com
info@toption-china.com

Rotary Evaporator

Scraped Film Evaporator /
Short Path (Molecular)
Distillation System

Chemical Glass
Reactor

High Shear Homogen-
eous Emulsification
Reactor

Pilot Ultrasonic
Emulsification
Reactor

Vacuum Filter / Glass
Liquid Separator

Photochemical
Glass Reactor

Hydrothermal
Synthesis Reactor

High Pressure
Reactor